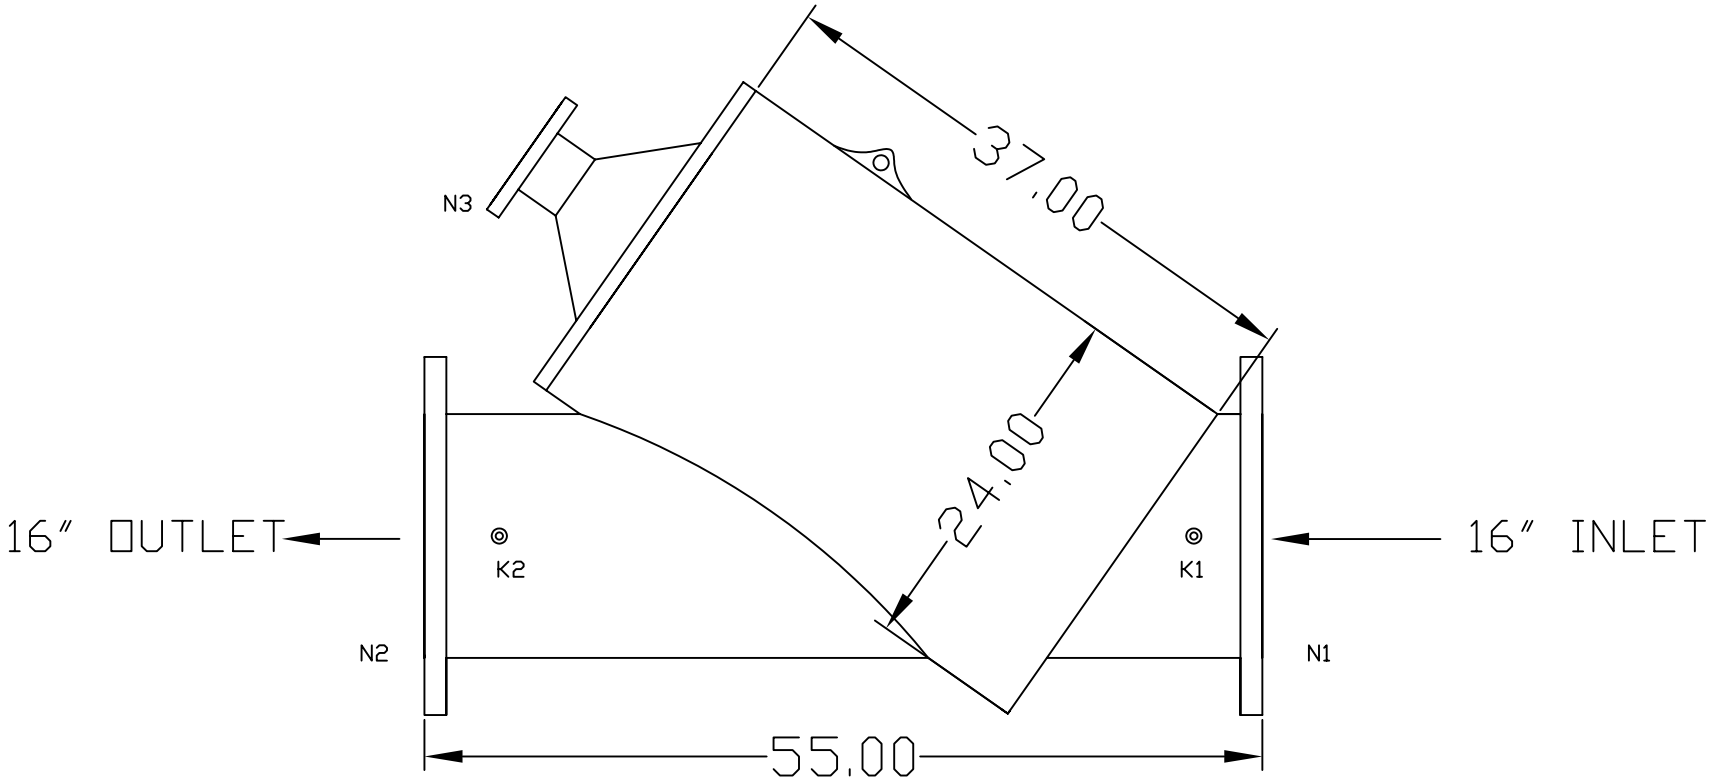

TECHNICAL DATA	
Flow Rate	Max. 6,000 GPM
Screen Size	___ Micron
Screen Area	12.5 Sq.Ft.
Working Temp.	200 deg. F
Working Pressure	150 PSI
Weight	800 lbs.

NOZZLE	CONNECTION	TYPE OF	SIZE		RATING
K1	Hi. Press. Conn.	Threaded	1/4"	NPT(2)	
K2	Low Press. Conn.	Threaded	1/4"	NPT(2)	
N1	Inlet	Flanged	16"	ANSI	150 lbs. F.F.
N2	Outlet	Flanged	16"	ANSI	150 lbs. F.F.
N3	Flushoutlet	Flanged	4"	ANSI	150 lbs. F.F.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES
DECIMALS .XX ± .05 .XXX ± .01
ANGULAR ± 0.5 DEG.

DRAWN	DATE
Daniel Stenberg	2-5-07
CHECKED	
DESIGN	

AUTOMATIC FILTERS, INC.

TITLE
TEKLEEN
16-L" COARSE SCREEN
FLUSHING FILTER

SIZE	DWG NO.	REV
A	CSFLUSH16L	0

SHEET OF