


1 2 3 4 5 6 7 8

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

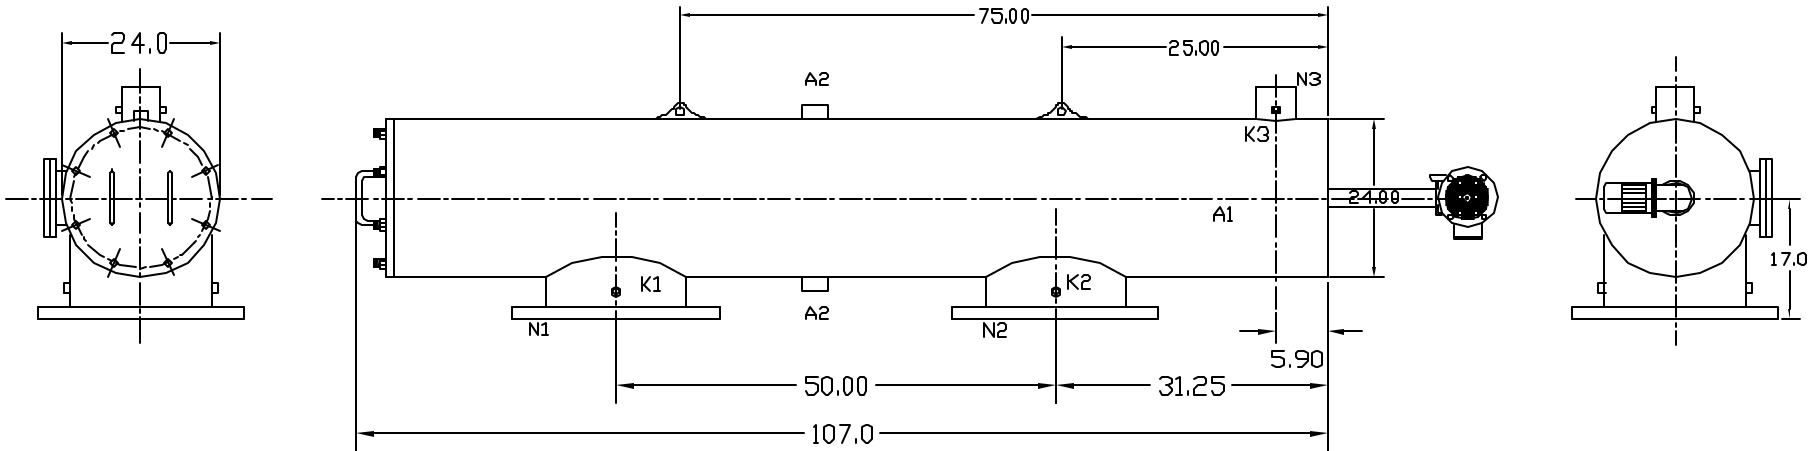

TECHNICAL DATA

Flow Rate Max. 6000 GPM
 Screen Size --- Micron
 Screen Area 16 sq.ft.
 Working Temp. 200 deg. F
 Working Pressure 150 PSI
 Empty Weight 1500 lbs.
 Full Weight ---- lbs.

NOZZLE	CONNECTION	TYPE OF CONNECTION	SIZE	RATING
A1	Service Port	Flanged	3.5" ASA	150 lbs. F.F. w/Blind
A2	Pressure Release	Threaded	1" NPT(2)	
K1	Hi. Press. Conn.	Threaded	1/4" NPT(2)	
K2	Low Press. Conn.	Threaded	1/4" NPT(2)	
K3	Flushoutlet Conn.	Threaded	1/4" NPT(2)	
N1	Inlet	Flanged	16" ASA	150 lbs. F.F.
N2	Outlet	Flanged	16" ASA	150 lbs. F.F.
N3	Flushoutlet	Threaded	2" NPT	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES		AUTOMATIC FILTERS, INC. 2672 S. LA CIENEGA BLVD. LOS ANGELES, CA 90034 (310) 839-2828 FAX (310) 839-6878	
DECIMALS ANGULAR XX ± .05 ± .05 DEG XXX ± .01		TITLE HDL16-LP	
DRAWN Daniel Stenberg	DATE 12-12-05	SIZE A	DWG NO. HDL16-LP-2
CHECKED		REV 0	
DESIGN		SCALE 1:20	SHEET OF