

**Actuator: EH2 Series 000-66-W1**

OPERATION: 1/4 Turn CCW (OPEN) / CW (CLOSE)



CASE: NEMA 6P (Immersable)

OPERATING TEMPERATURE: -40~~ 180-F

MOUNTING: No Position Requirements

DUTY CYCLE: 50%

Weatherpack 4-pin Tower

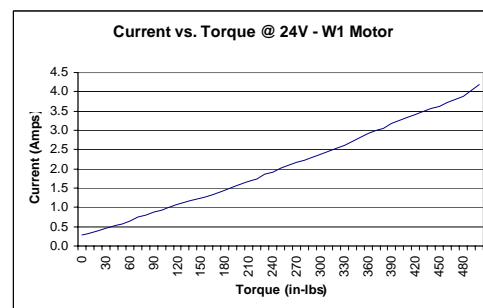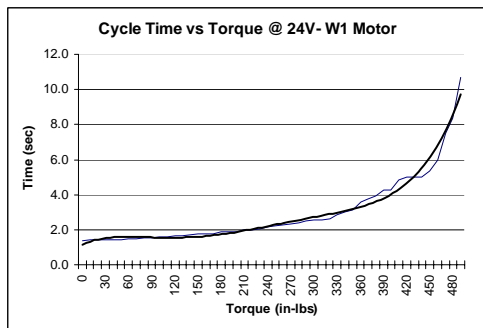

**Electrical Connection**

INPUT POWER: 24 VAC, 5A

CONTROL SIGNAL POWER: 24 VAC, 120 mA

CONNECTOR: Weatherpack 1201-5797

PIN A: Black (Constant 24 VAC Neutral)


PIN B: Blank

PIN C: White (Signal Switched)

24 VAC (Hot) = Relay Energized (Open)

0 VAC = Relay De-energized (Close)

PIN D: Red (Constant 24 VAC Line)

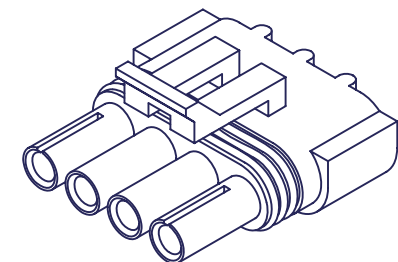

**CABLE**

JACKET: GPT

LENGTH: 15" ~ 18" Free Length

**FUSING**

Internal, Re-setable 2.5 A Poly Thermal

Disconnect power to reset

<p><b>1" SS FP Ball Valve 1000 WOG EH2 Series Actuator</b></p>			REV	Version
			1	V11
SHEET		OF		
1		2		


**VALVE: 89F**

TYPE: 1" Full Port SS CF8M  
PRESSURE: 1000 psi max WOG  
CONNECTION: 1" NPT  
Cv: 68


**SERVICE PARTS**

VALVE SEAL KIT: EH-126  
ACTUATOR: 000-66-W1-001

**VIRGIN PTFE SEATS**

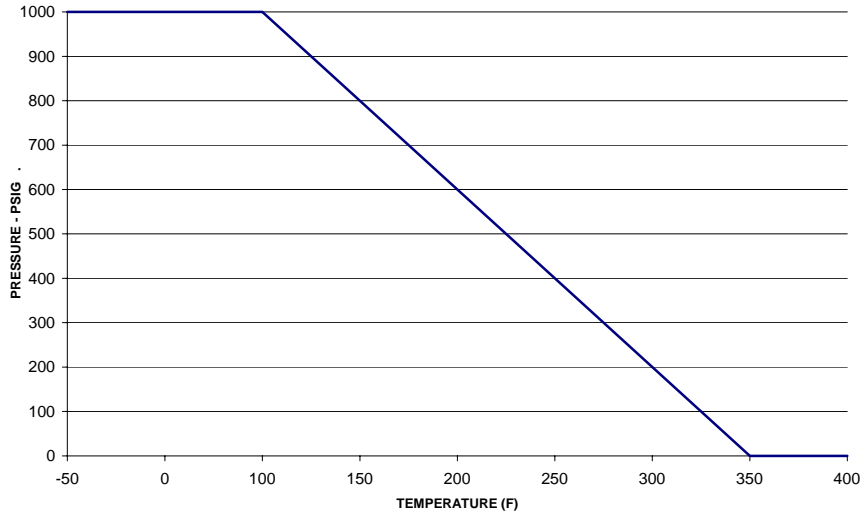

\*\*\*Note: Wire Wheel KZCO logo off valve body

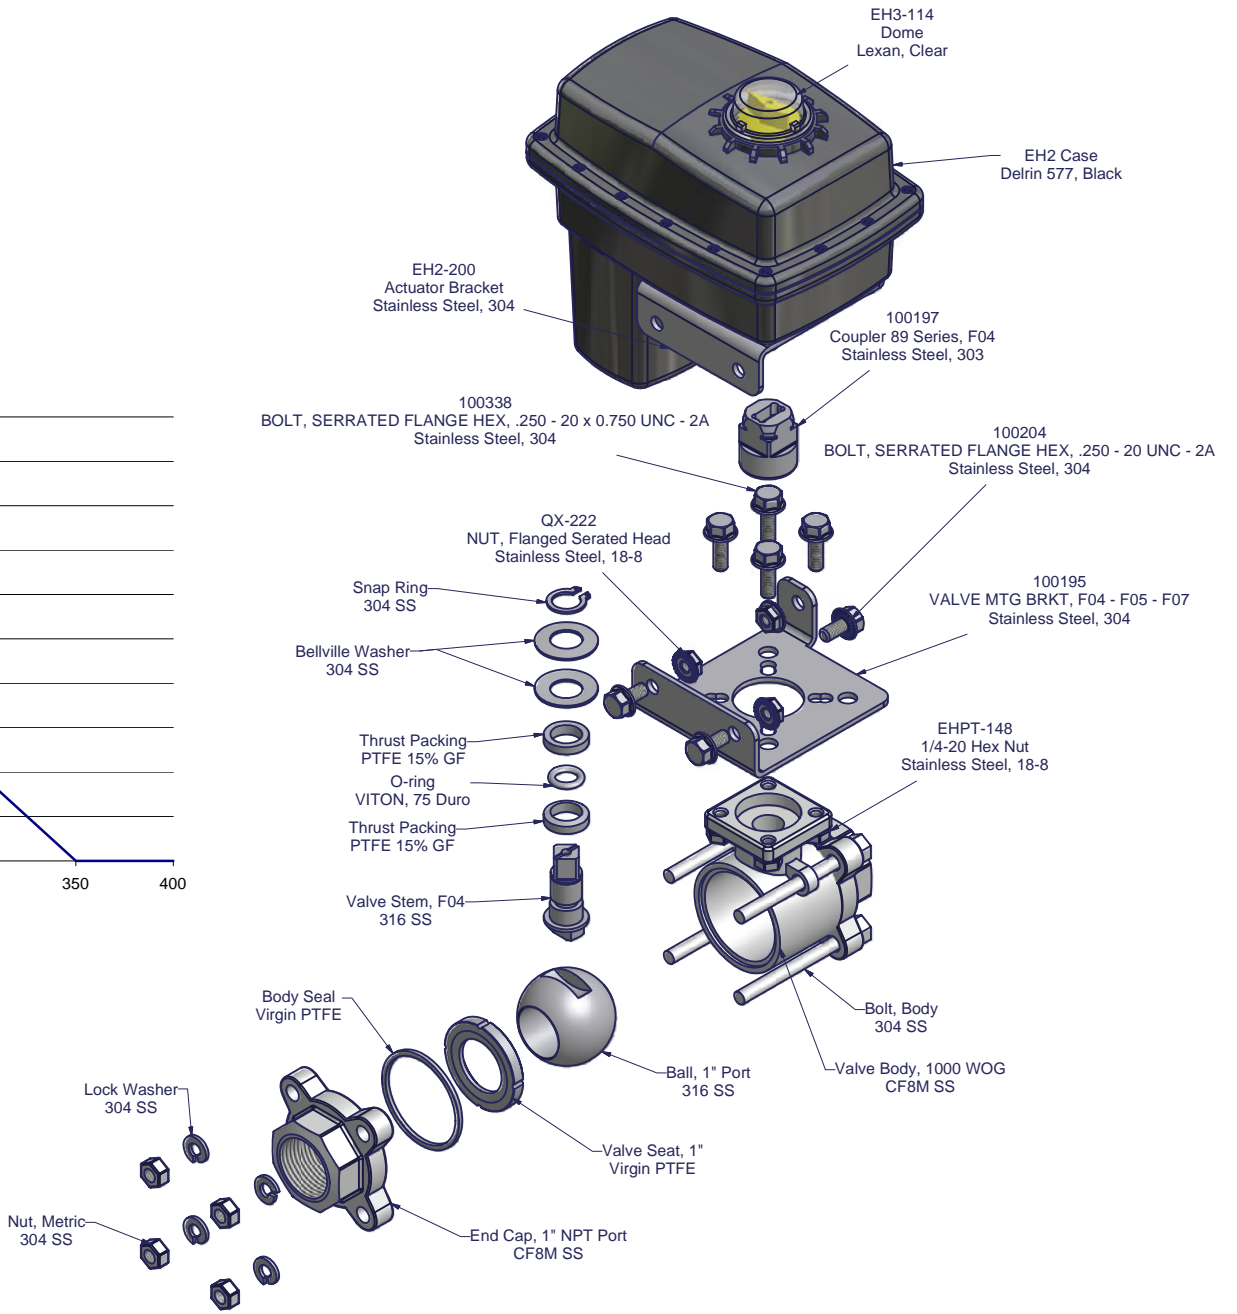

<b>1" SS FP Ball Valve 1000 WOG EH2 Series Actuator</b>		7/21/2005	
REV	1	Version	V12
SHEET 2		OF 2	