


NOTES:
 1. MOTOR DRIVE BOARD & RELAYS ARE LOCATED INSIDE ELECTRIC CONTROLLER BOX. SEE DRAWING WIRE-2LPFGB7-CON-04 FOR DETAILED WIRING OF COMPONENTS TO ELECTRIC CONTROLLER.
 2. MOTOR MUST ROTATE COUNTER CLOCKWISE FROM VIEWPOINT FOR FILTERS THAT CONTAIN A FINE SCREEN WITH AREA LESS THAN 5.0 SQ. FT. (I.E. MODELS LPF2-SP, 2-XLP, 3-LP, 3-SP, 4-LPE, 4-P, & 6-P). MOTOR MUST ROTATE CLOCKWISE FOR ALL OTHER FILTERS.

REVISIONS				
REV	ZONE	DESCRIPTION	DATE	APPROVED
01	ALL	ADDED SOLENOID VALVES FOR PISTON VENTS.	03/08/16	S.P.
02	ALL	MOUNT SOLENOID DIRECTLY TO PISTON END	01/30/18	R.L.

GB7 ELECTRIC CONTROLLER

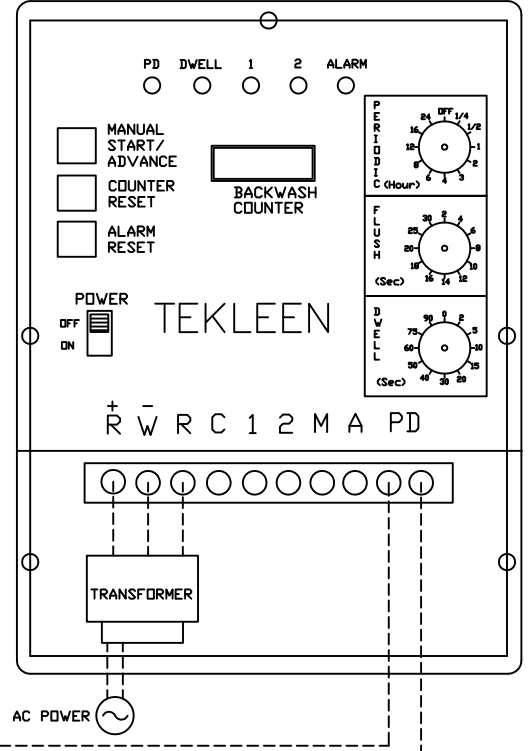

Electric Connection -----
 Hydraulic Connection =====

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES		AUTOMATIC FILTERS, INC. 2672 S. LA CIENEGA BLVD. LOS ANGELES, CA 90034 (310) 839-2828 FAX (310) 839-6878	
DECIMALS .XX ± .05 .XXX ± .01		ANGULAR ± 0.5 DEG.	
DRAWN S. PERKINSON		DATE 02/28/12	
CHECKED		TITLE 2 LPF FILTERS IN PARALLEL WITH GB7 ELECTRIC CONTROLLER, ELECTRIC FLUSH VALVES, & 24VAC ELECTRIC BYPASS VALVE	
DESIGN		SIZE A	REV 02
NDT TO SCALE		SHEET 1 OF 1	