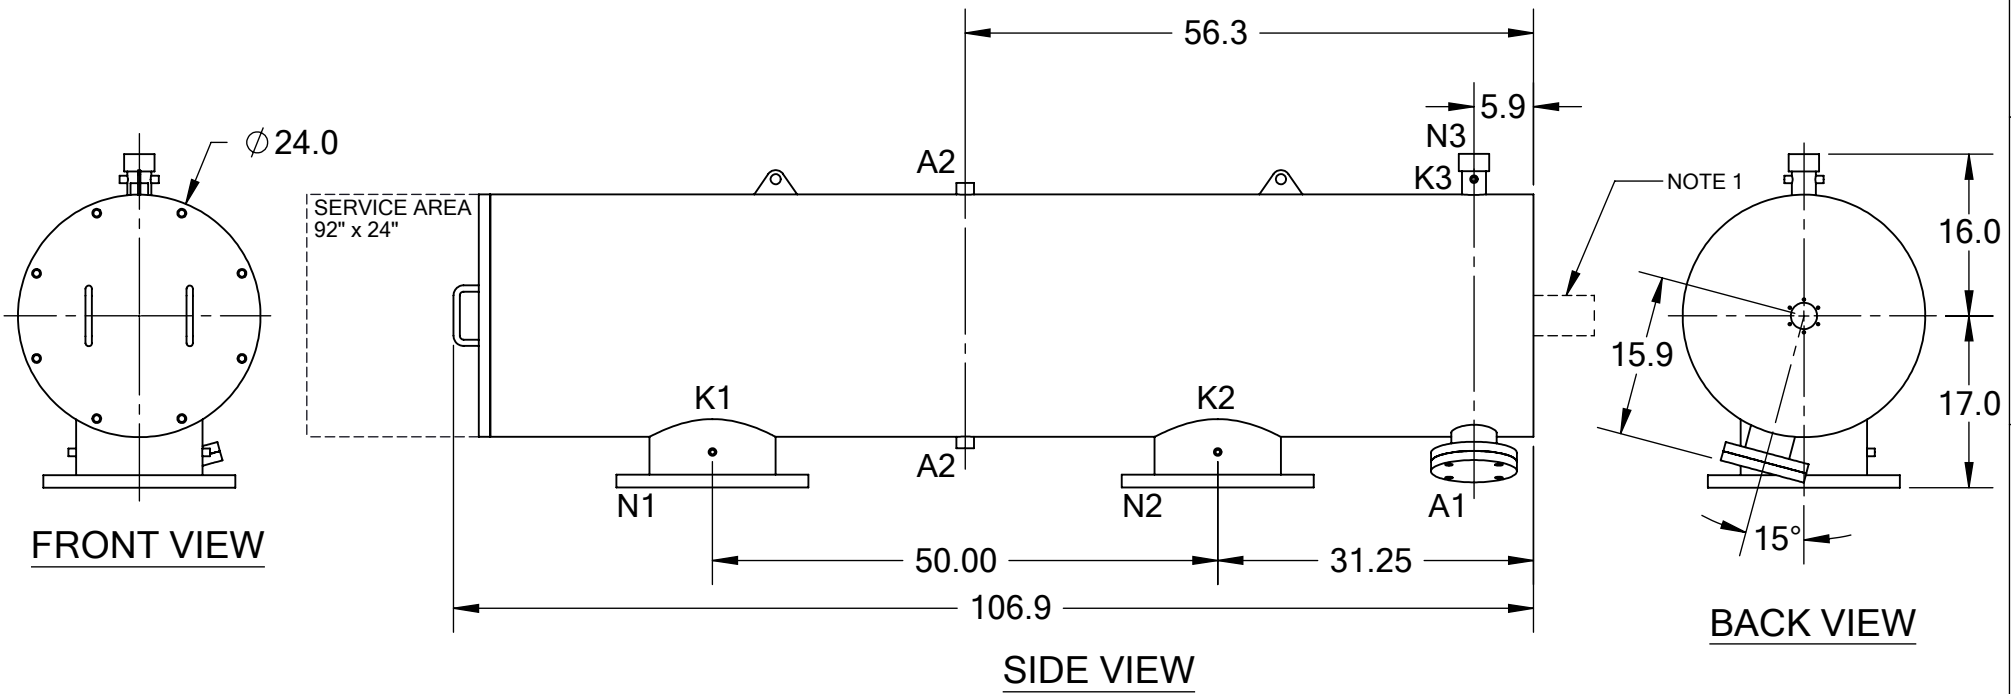


REVISIONS				
REV.	ZONE	DESCRIPTION	DATE	INITIAL
1	ALL	REMOVED FILTER EAR DIMENSIONS, CHANGED WORKING TEMP & PRESSURE TO DESIGN TEMP & PRESSURE	05/01/13	J.K.
2	7D	ADDED NOTE 1.	10/17/14	M.S.






TECHNICAL DATA

FLOW RATE	MAX. 6,000 GPM (1,363 m ³ /hr)
SCREEN SIZE	____ MICRON
SCREEN AREA	16.0 SQ. FEET
DESIGN TEMPERATURE	160 °F
DESIGN PRESSURE	150 PSI
EMPTY WEIGHT	~1,300 LBS.
FULL WEIGHT	~2,000 LBS.

NOTES:

- PLEASE ALLOW ~20" ADDITIONAL TO INSTALL AND REMOVE THE PISTON ASSEMBLY TO THE BACKSIDE OF THE FILTER.

NOZZLE	CONNECTION	TYPE	SIZE	RATING	TOLERANCES (UNLESS OTHERWISE SPECIFIED)		 2672 S. LA CIENEGA BLVD. LOS ANGELES, CA 90034 MAIN: (310) 839-2828 FAX: (310) 839-6878	
A1	SERVICE PORT	FLANGED	3.5" ASA	CL. #150 F.F. w/ Blind	FRAC. ±1/16	ANGLE ±1°		
A2	PRESSURE RELEASE	THREADED	1" NPT(2)		.X ±.1			
K1	HIGH PRESSURE CONN.	THREADED	1/4" NPT(2)	CLASS #150 F.F.S.O.	.XX ±.05			
K2	LOW PRESSURE CONN.	THREADED	1/4" NPT(2)		.XXX ±.010			
K3	HYDRAULIC CONN.	THREADED	1/4" NPT(2)	CLASS #150 F.F.S.O.	MATERIAL: SST		TITLE:	
N1	INLET	FLANGED	12" ASA		DRAWN BY: S. PERKINSON		ABW12-XLP FILTER, CUT DRAWING	
N2	OUTLET	FLANGED	12" ASA		DATE: 06/13/11		DRAWING NUMBER	
N3	FLUSH OUTLET	THREADED	2" NPT	SCALE: 1:19		SHEET: 1 OF 1	REV	
							ABW-12XLP-CUT-01	2