


REVISIONS				
REV.	ZONE	DESCRIPTION	DATE	INITIAL
1	ALL	ADDED SERVICE PORT, CHANGED "WORKING" TO "DESIGN" & TEMPERATURE FROM "200°F" TO "160°F" IN TECHNICAL TABLE, ADDED 2" NPT THREAD TO FLANGES.	01/10/13	S.P.

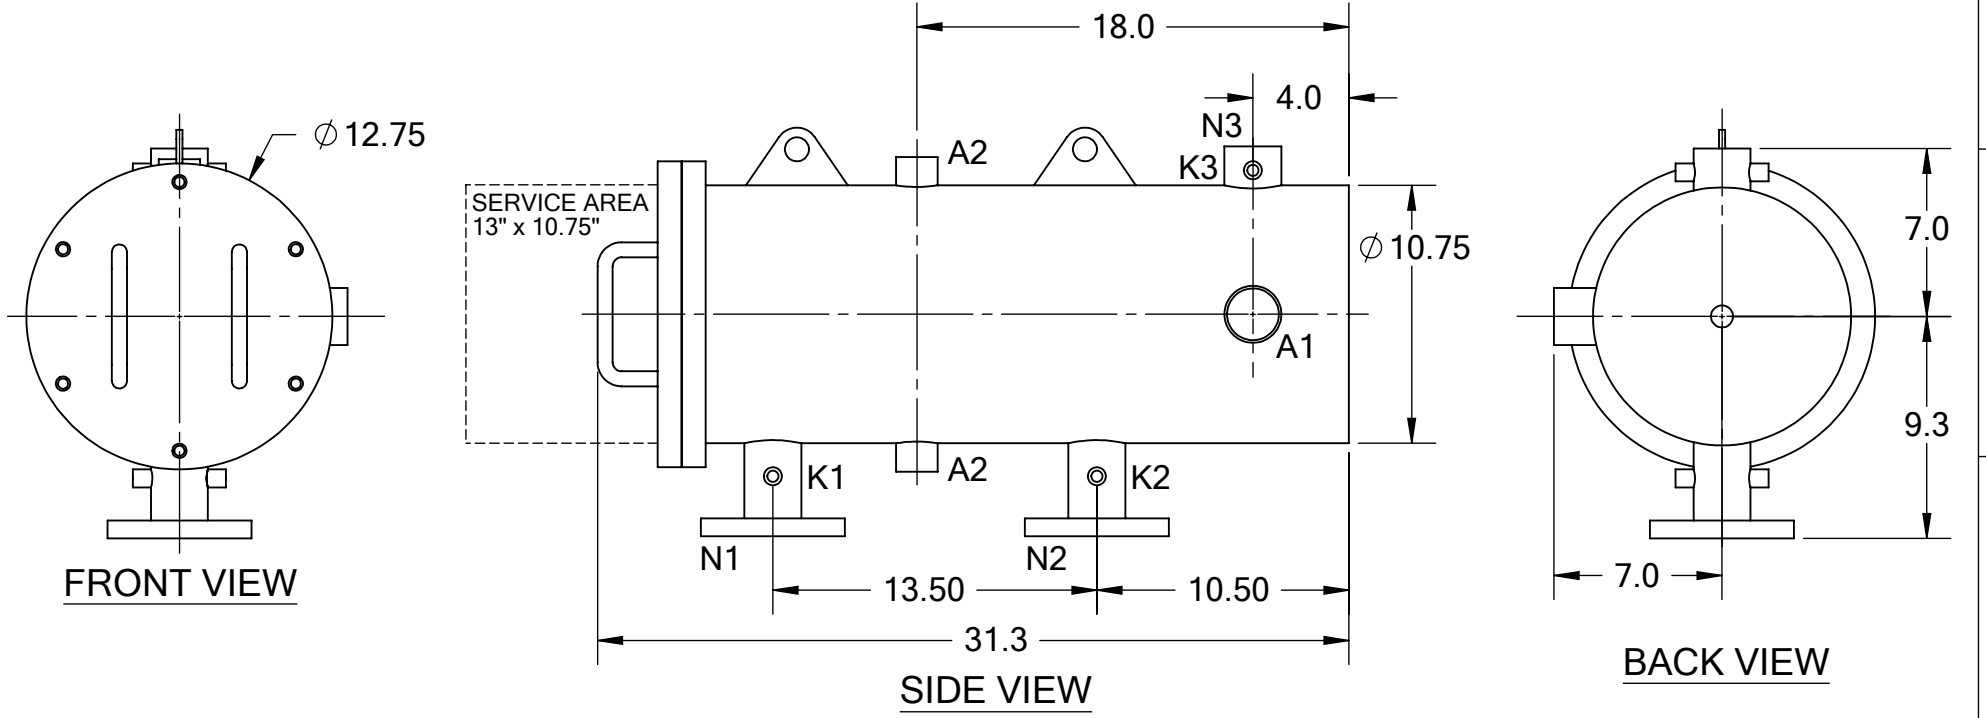

TECHNICAL DATA

FLOW RATE	MAX. 200 GPM (45 m ³ /hr)
SCREEN SIZE	____ MICRON
SCREEN AREA	1.4 SQ. FEET
DESIGN TEMPERATURE	160 °F
DESIGN PRESSURE	150 PSI
EMPTY WEIGHT	~150 LBS.
FULL WEIGHT	~250 LBS.

NOZZLE	CONNECTION	TYPE	SIZE	RATING
A1	SERVICE PORT	THREADED	2" NPT	CLASS #150 F.F.S.O. CLASS #150 F.F.S.O.
A2	PRESSURE RELEASE	THREADED	1" NPT(2)	
K1	HIGH PRESSURE CONN.	THREADED	1/4" NPT(2)	
K2	LOW PRESSURE CONN.	THREADED	1/4" NPT(2)	
K3	HYDRAULIC CONN.	THREADED	1/4" NPT(2)	
N1	INLET	FLANGED/THREADED	2" ASA W/ 2" NPT	
N2	OUTLET	FLANGED/THREADED	2" ASA W/ 2" NPT	
N3	FLUSH OUTLET	THREADED	2" NPT	

TOLERANCES (UNLESS OTHERWISE SPECIFIED)

FRAC. ±1/16 ANGLE ±1°

.X ±.1
.XX ±.05
.XXX ±.010

MATERIAL: SST

DRAWN BY: S. PERKINSON

DATE: 09/20/11

SCALE: 1:8 **SHEET:** 1 OF 1

TEKLEEN®
Automatic Filters Inc.

2672 S. LA CIENEGA BLVD.
LOS ANGELES, CA 90034
MAIN: (310) 839-2828
FAX: (310) 839-6878

TITLE: ABW2-SP FILTER WITH 2" NPT SERVICE PORT, CUT DRAWING

DRAWING NUMBER: ABW-2SP-CUT-01 **REV:** 1