


REVISIONS				
REV.	ZONE	DESCRIPTION	DATE	INITIAL
1	1B, 2B	CHANGED "WORKING" TO "DESIGN" & TEMPERATURE FROM 200°F TO 160°F IN TECHNICAL DATA TABLE.	09/27/12	S.P.
2	7D	ADDED NOTE 1.	10/17/14	M.S.

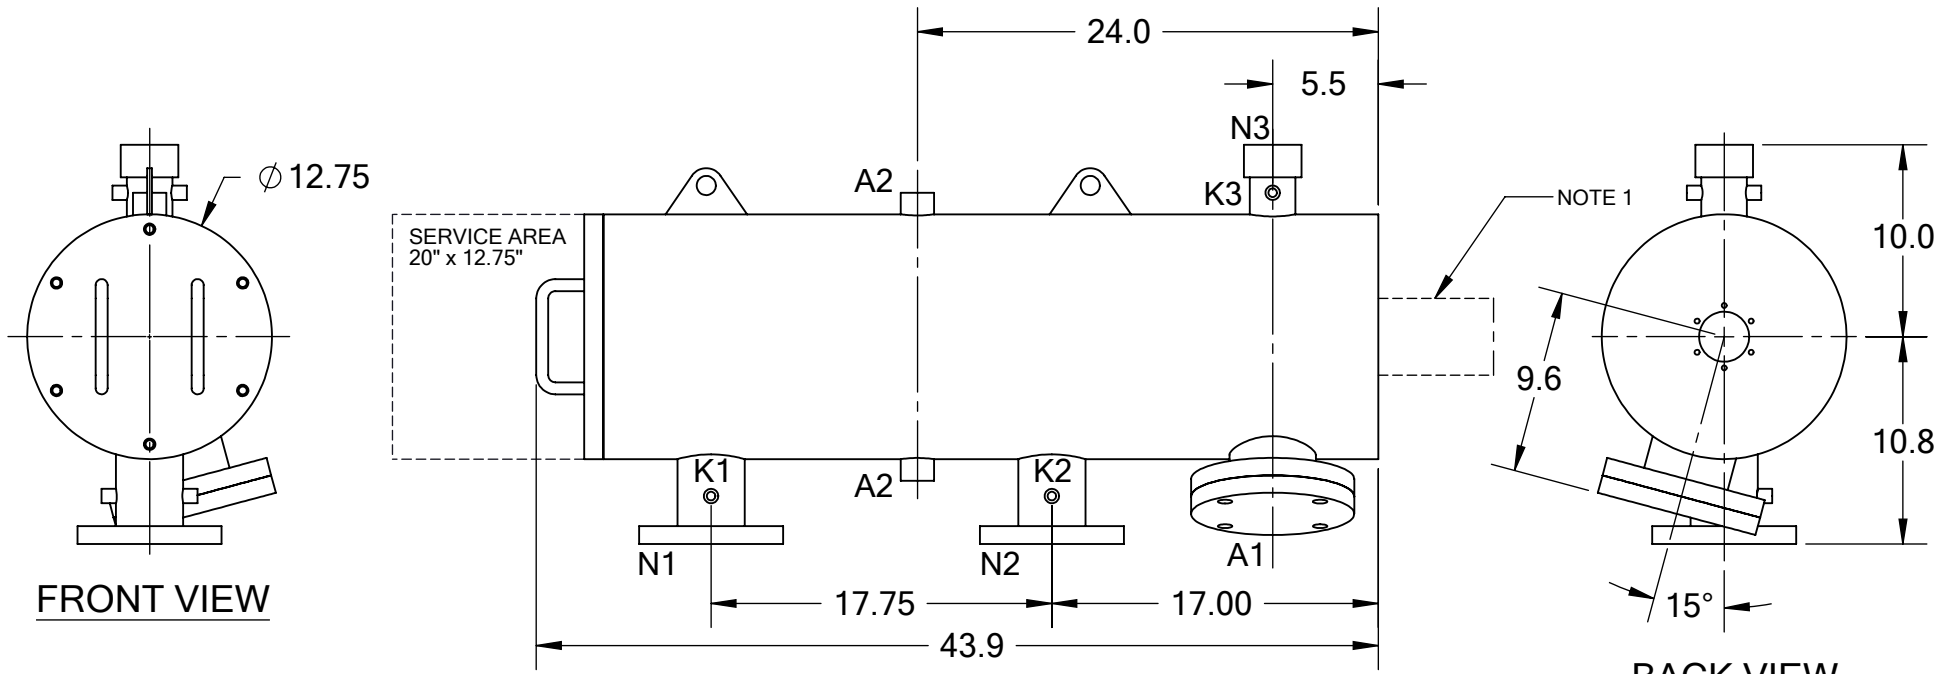


TECHNICAL DATA

FLOW RATE	MAX. 300 GPM (68 m ³ /hr)
SCREEN SIZE	___ MICRON
SCREEN AREA	2.5 SQ. FEET
DESIGN TEMPERATURE	160 °F
DESIGN PRESSURE	150 PSI
EMPTY WEIGHT	~250 LBS.
FULL WEIGHT	~450 LBS.

SIDE VIEW

NOTES:

- PLEASE ALLOW ~20" ADDITIONAL TO INSTALL AND REMOVE THE PISTON ASSEMBLY TO THE BACKSIDE OF THE FILTER.

NOZZLE	CONNECTION	TYPE	SIZE	RATING	TOLERANCES (UNLESS OTHERWISE SPECIFIED)	 TEKLEEN <i>Automatic Filters Inc.</i> 2672 S. LA CIENEGA BLVD. LOS ANGELES, CA 90034 MAIN: (310) 839-2828 FAX: (310) 839-6878
A1	SERVICE PORT	FLANGED	3.5" ASA	CL. #150 F.F. w/ Blind		
A2	PRESSURE RELEASE	THREADED	1" NPT(2)		MATERIAL: SST	TITLE: ABW3-LP FILTER, CUT DRAWING
K1	HIGH PRESSURE CONN.	THREADED	1/4" NPT(2)		DRAWN BY: S. PERKINSON	
K2	LOW PRESSURE CONN.	THREADED	1/4" NPT(2)		DATE: 06/21/11	DRAWING NUMBER REV ABW-3LP-CUT-01 2
K3	HYDRAULIC CONN.	THREADED	1/4" NPT(2)		SCALE: 1:10 SHEET: 1 OF 1	
N1	INLET	FLANGED	3" ASA	CLASS #150 F.F.S.O.		
N2	OUTLET	FLANGED	3" ASA	CLASS #150 F.F.S.O.		
N3	FLUSH OUTLET	THREADED	2" NPT			